





S

IC

- SIP
- IC
-
-
-
- /
-
-

1

DC 24V/PoE 48V
300mA/DC12~24V
-40 ~70

75mA/PoE 48V
-20 ~70
(W/H/D) 120 194


44.7mm


2

CMOS

200W

95 0 lux
2.2mm
12

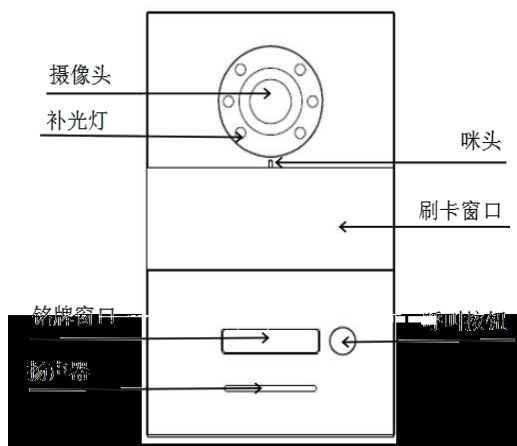

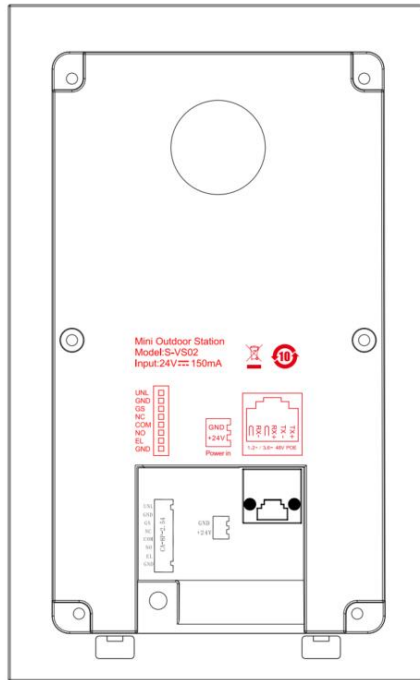

RJ45

48V

PoE

GND +24V

24V




UNL GND


GS GND

NO COM NC



/

EL GND 12V

	W/H/D 100.6 175.5 39mm
	
	

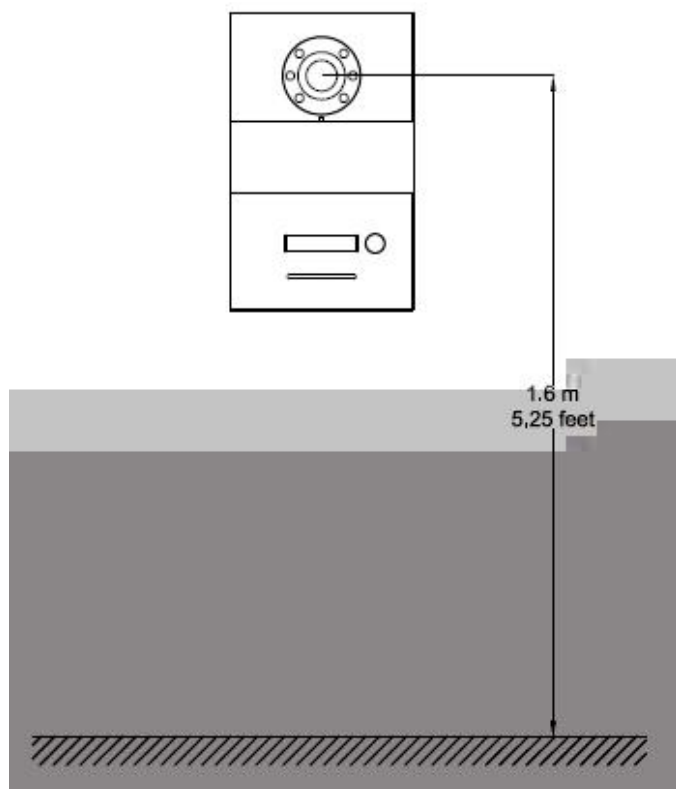


1.6

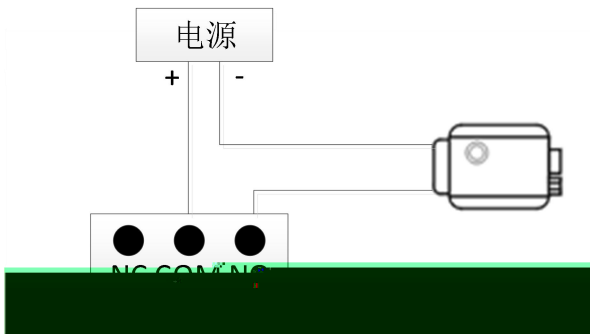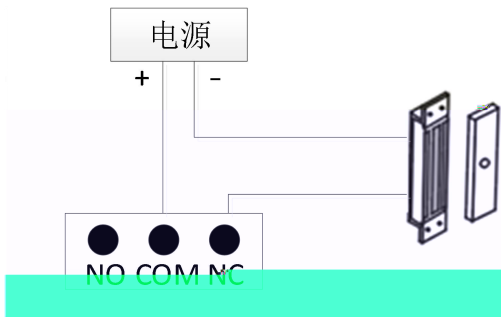


800mA

•

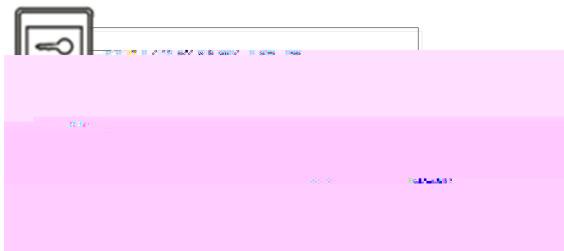

•

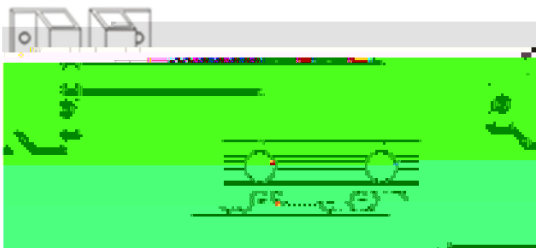


1. GS
2. -> ->

1 WpfAppUpdate

2


3 SO001 801801 0 0
MAC IP

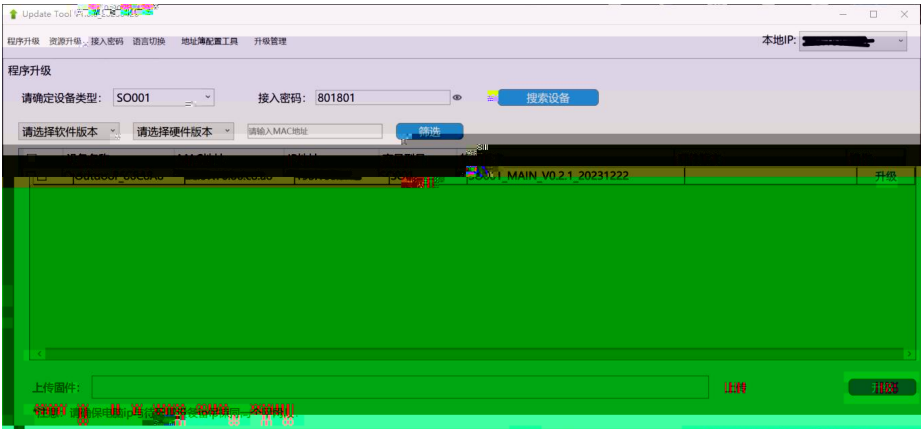


4 http://ip_address/#/ http://192.168.151.5/#/

admin

IP IP

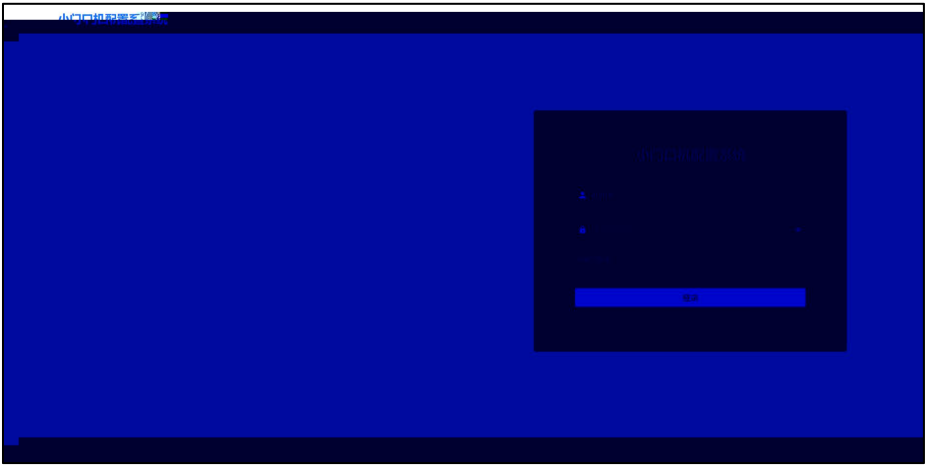

SIP

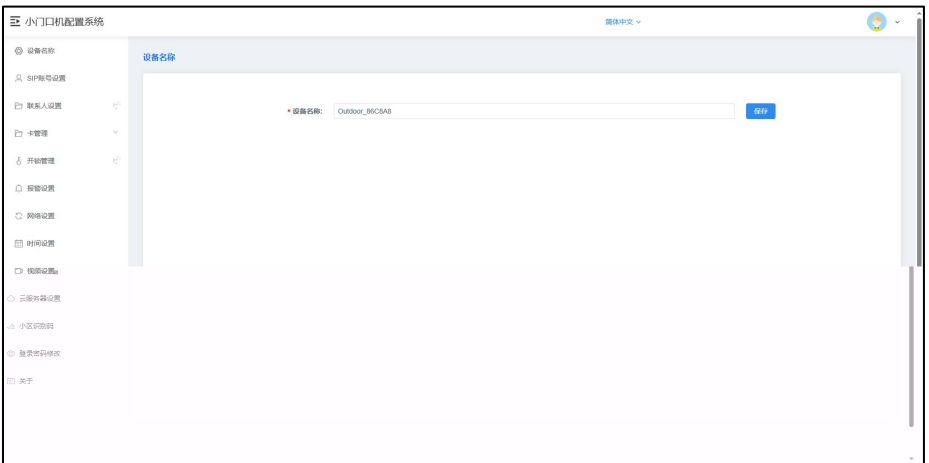

(1)

SIP

(2)

SIP

IP

SIP

(3)

SIP


SIP


(4) SIP



1 2


SIP

UDP TLS

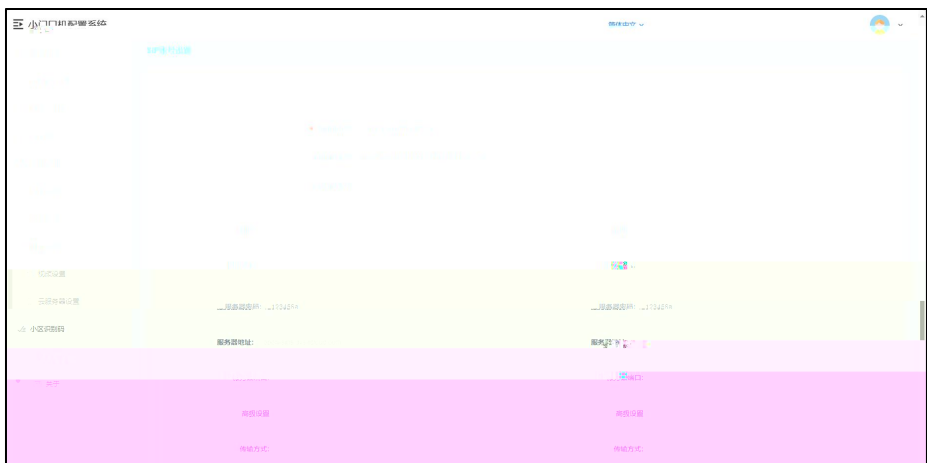 $\wedge$ $\succ$

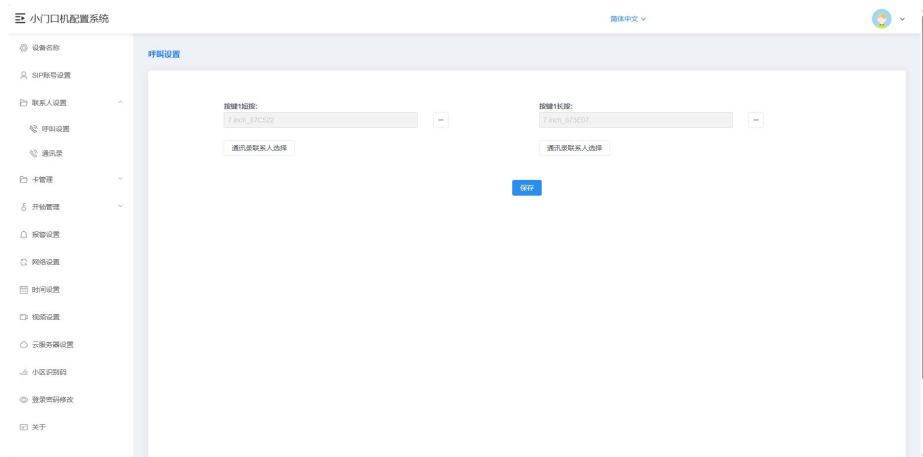

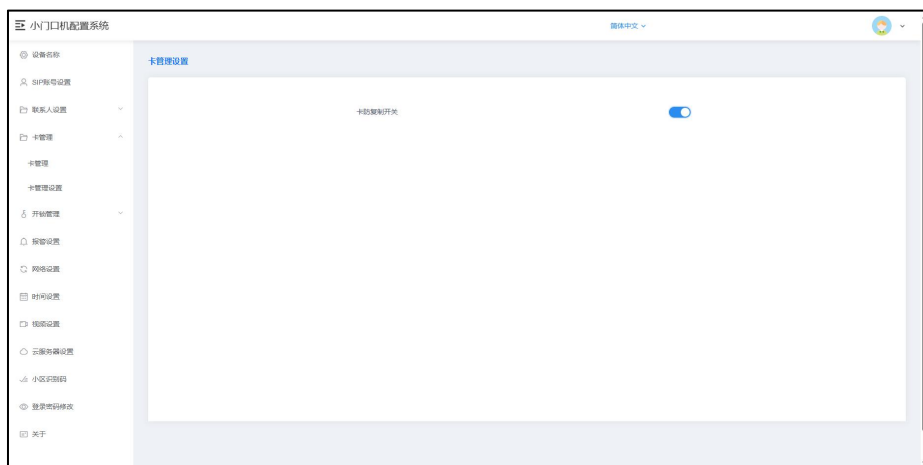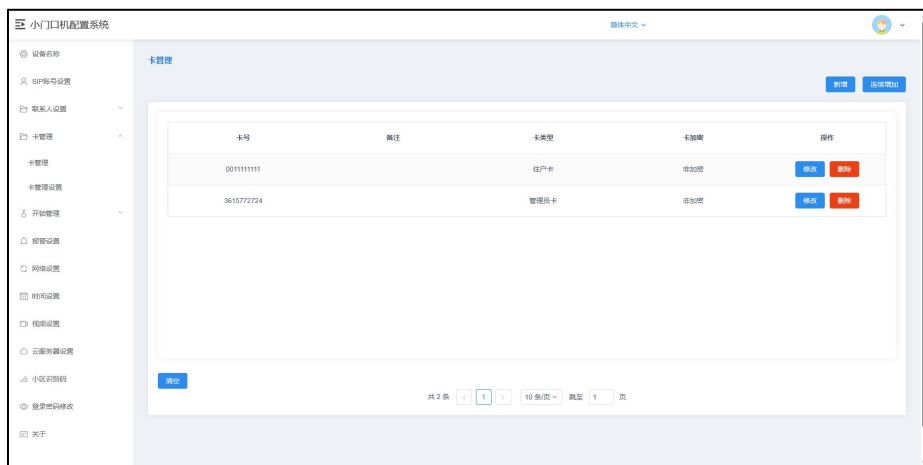

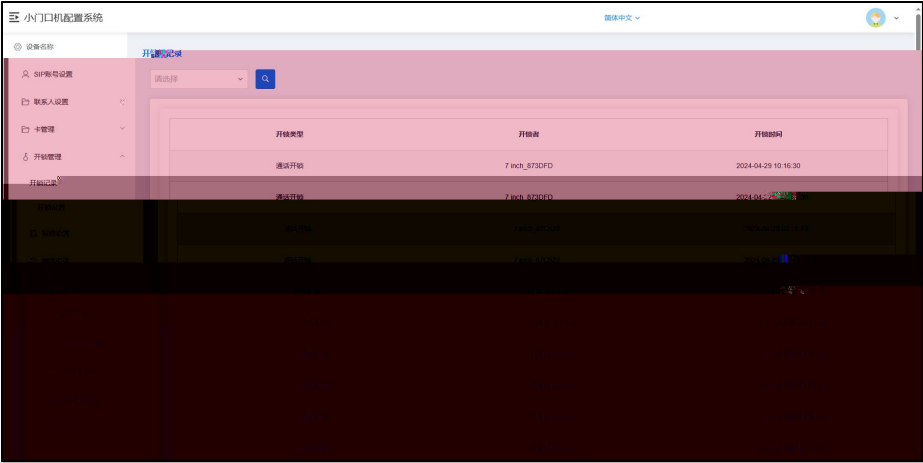

(1)

1~30

(2)

/ DTMF / DTMF DTMF
666666 888888 /
/




1

2

3

120

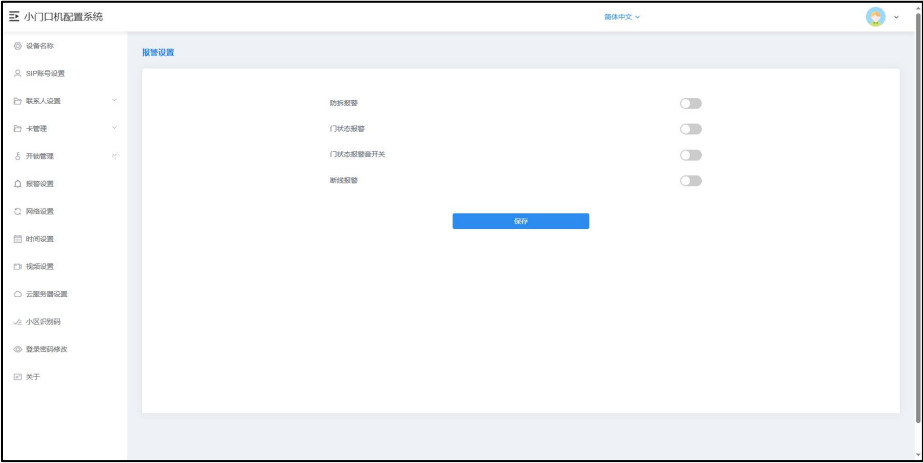


(1)

S

(2) DHCP

IP

DNS

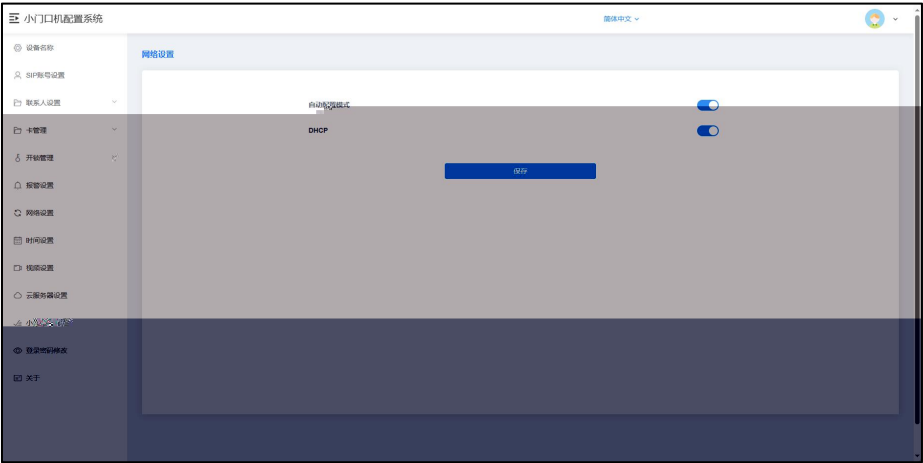

(1)

NTP


(2) NTP

NTP



(3)


NTP



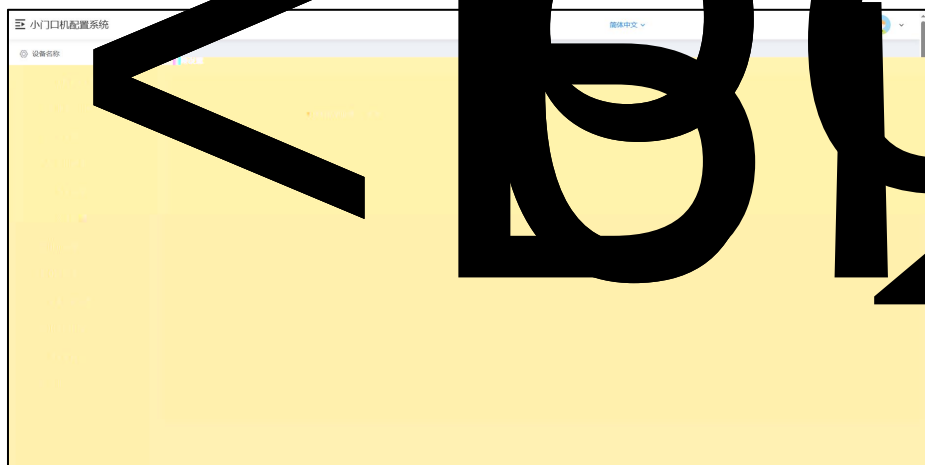

(1) /

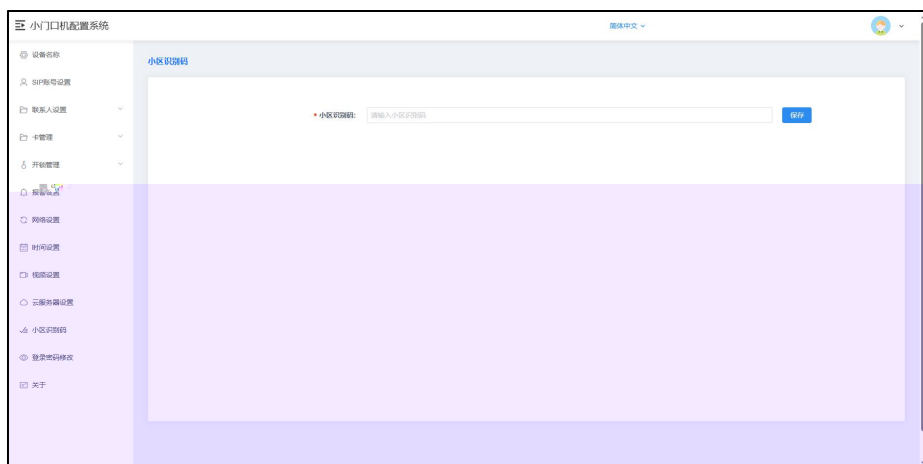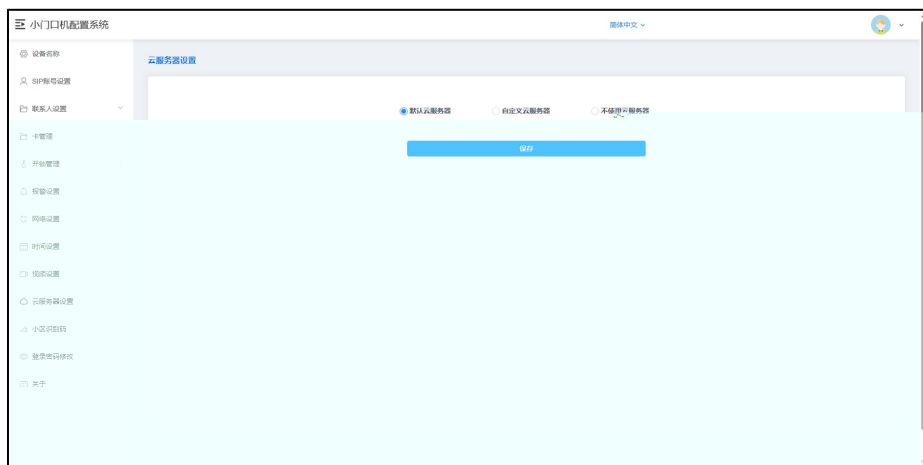

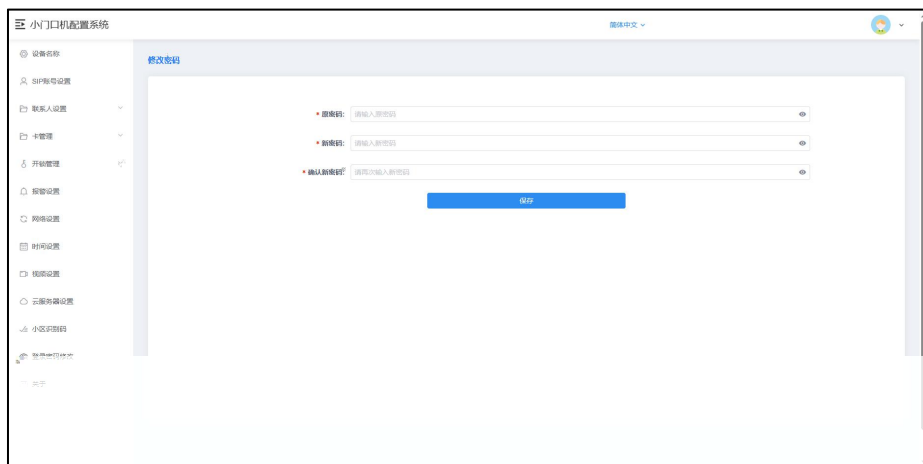

SIP DNS MAC MCU LAN

